



YOGA ROLL OIL



A profiled top and bottom provide very high slip resistance, even when liquids and oils get to the floor.

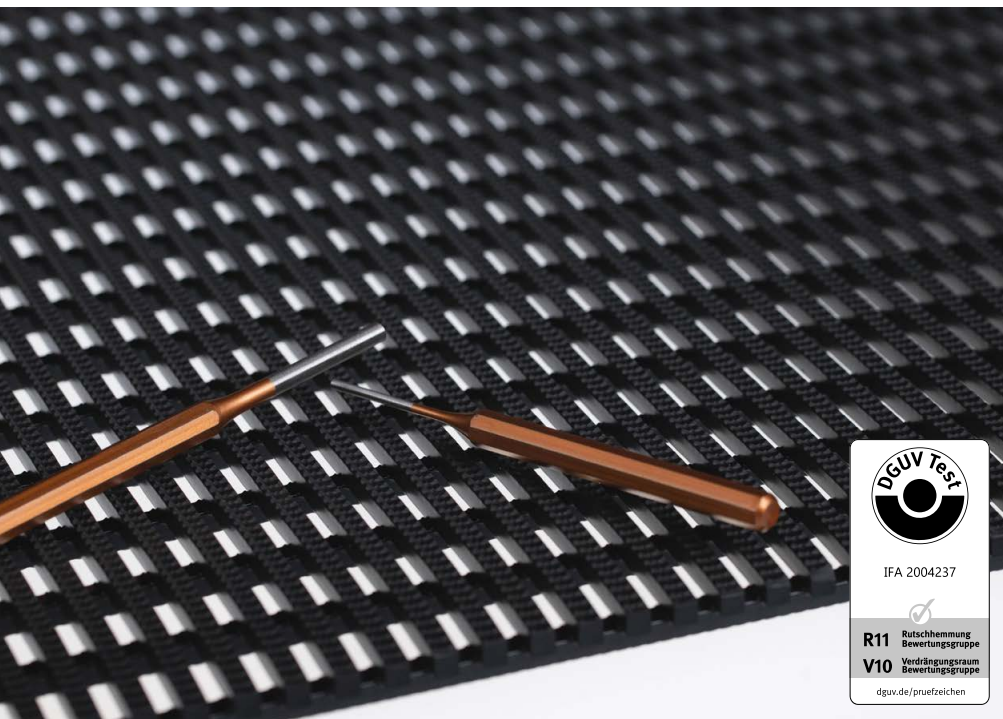

Sizes:

60 cm × max. 10 m
90 cm × max. 10 m
120 cm × max. 10 m

Thickness: 15 mm

Weight: 7,7 kg/m²

Surface:

grid-like structure, perforated

Material:

polyvinyl chloride (PVC)

Hardness: 80° ±5 Shore A

Slip resistance:

very good / R11 (DIN 51130)

Displacement space:

V10 (DIN 51130)

Characteristics


- two-layer grid construction, consisting of pore-free PVC
- liquids can easily run through, which makes the use in commerce and industry, but also in food industry such as in cold storage houses particularly useful
- temperature-resistant (-23 °C to +60 °C)
- UV-resistant (except red flooring), resistant to alkalis and acids, corrosion resistant
- YOGA ROLL OIL is passable with hand truck.
- 100 % recyclable
- excellent footfall sound absorption
- resistant to oils, acids and chemicals in case of short-term exposure (please request a test sample)

Cleaning Instructions

High pressure cleaner or industrial dry vacuum cleaner are ideal for an accurate cleaning. For a simple and quick cleaning you can also wash it down with water or simply sweep it off.

Installation

Aids, which are needed for laying: box cutter, meter rod/measuring tape. Fixing or gluing is not necessary.



black