



# YOGA OCTA OIL



Liquids and oils are able to run through due to octagonal holes of YOGA OCTA OIL. For large and individually manufactured working areas.

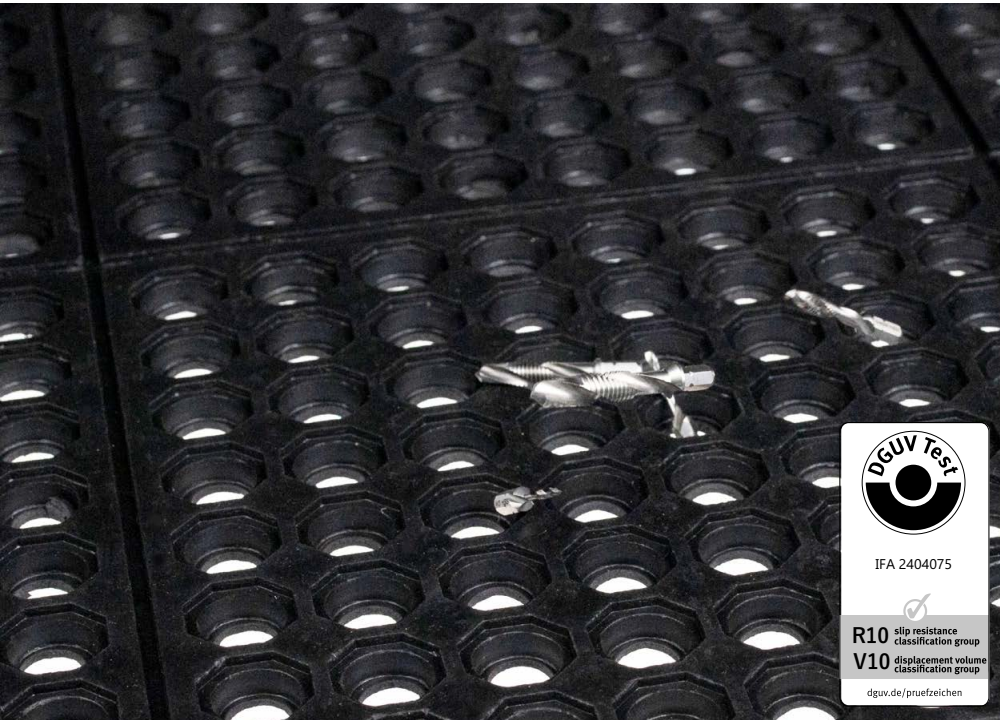

## Sizes:

90 cm × 90 cm

**Thickness:** 15 mm

**Weight:** 14,1 kg/m<sup>2</sup>

## Surface:

octagonal perforations

## Material:

nitrile rubber (NBR)

## Slip resistance:

good / R10 (DIN EN 16165)

## Displacement space:

V10 (DIN 51130)

## Accessories:

edging with corner

97 × 7 cm

## Characteristics

- flexible modular system for dry and wet areas: the individual mats can be plugged together to form a floor covering that covers the entire area
- the octagonal holes allow small parts to fall through, while at the same time they protect falling tools or utensils
- YOGA OCTA OIL is resistant to oils and chemicals, the working area remains dry, sure-footed and non-slip; especially suitable for machine workstations or assembly lines
- linking with YOGA SOLID mats possible (so that different areas of application can be covered)
- thanks to the bevelled edging YOGA OCTA OIL is passable (hand trucks, hand carts etc.)

## Cleaning Instructions

High pressure cleaner or industrial dry vacuum cleaner are ideal for an accurate cleaning. For a simple and quick cleaning you can also wash it down with water or simply sweep it off.

## Installation

One mat is equipped with nubs on two sides and eyelets on the other two sides. This allows them to be quickly and easily plugged into each other.



black



yellow edge



black edge