


# YOGA ERGO FUSION



YOGA ERGO FIRE and YOGA ERGO STAT rolled into one: YOGA ERGO FUSION is characterized by low flammability and an excellent conductivity.

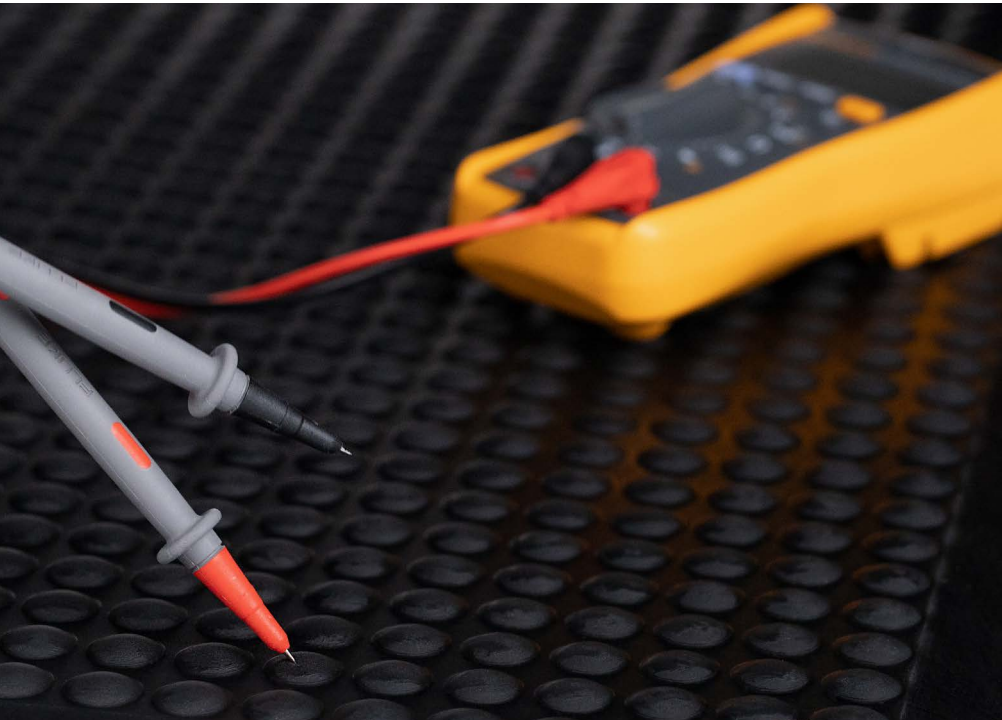

## Sizes:

65 cm × 95 cm, 65 cm × 185 cm  
95 cm × 125 cm, 95 cm × 185 cm  
Special sizes on request

**Thickness:** 14 mm

**Weight:** 5 kg/m<sup>2</sup>

**Hardness:** 30° ±5 Shore A

## Surface:

nubs, closed

## Material:

polyurethane (PU)

## Fire behavior:

Cfl-S1 (DIN EN 13501-1)

## Slip resistance:

good / R10 (DIN 51130)

## Displacement space:

V10 (DIN 51130)

## Conductivity:

DIN IEC 61340-4-1/

ESD 1 × 10<sup>8</sup> Ohm

## Accessories:

grounding module and  
grounding cable

## Characteristics


- silicone-free and fireproof workplace mat with very good conductivity, ideal to use at ESD workstations or production facilities with sensitive devices
- available in special shapes and sizes
- noise-insulating and slip resistant surface
- beveled edges on all sides reduce trip hazards
- conditionally resistant to oils and chemicals (please request a test sample)
- provides excellent insulations against cold floors
- temperature-resistant (-40 °C to +80 °C)
- can be driven on (with hand truck, hand cart or material shuttles)
- made in Germany

## Cleaning Instructions

High pressure cleaner or industrial dry vacuum cleaner are ideal for an accurate cleaning. For a simple and quick cleaning you can also wash it down with water or simply sweep it off.

## Installation

Fixing or gluing is not necessary.



black