


YOGA FLAT GRIP



Thanks to the tiny grains of granite and the structured surface YOGA FLAT GRIP is very slip resistant and also extremely hard-wearing.

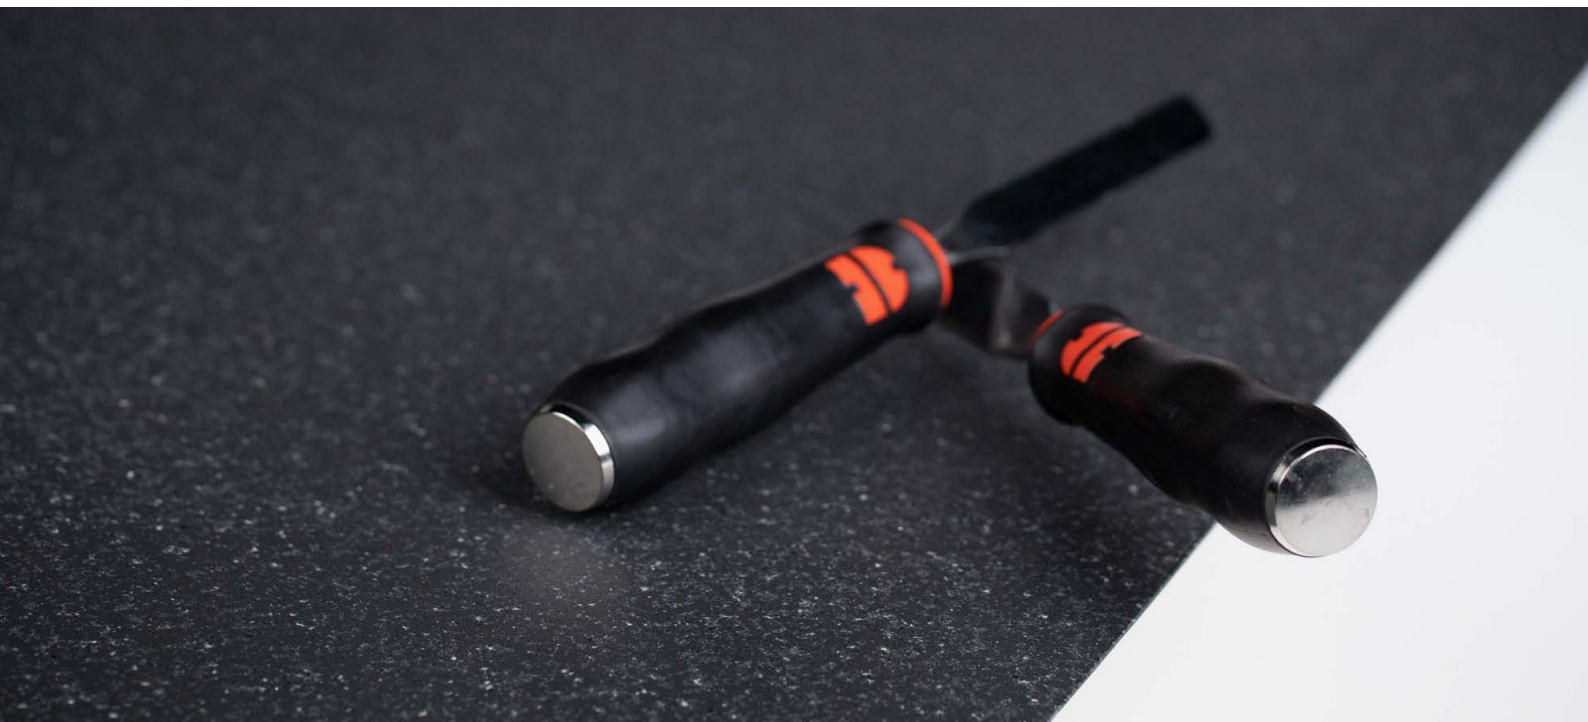

Sizes:

120 cm × max. 15 m

Thickness: 2 mm

Hardness: 92 Shore A

Surface:

closed with structure

Material:

rubber with
granite sprinkling

Fire behavior:

Cfl-s1 (EN 13501-1)

Slip resistance:

very good / R11 (DIN 51130)

Characteristics


- high slip resistance (slip resistance is supported by the granite)
- environmental compatibility (free from PVC, phthalate plasticizers, halogens)
- made in Germany
- compatible with floor heating systems and castor chairs
- chemical resistance depending on the concentration and exposure time (please request a test sample)
- increased safety thanks to high fire-retardant properties
- contributes to more pleasant room acoustics (high footfall sound absorption: 6–8 dB)
- good for use in indoor areas (for example in industry, the healthcare industry, the education sector, etc.)

Cleaning Instructions

YOGA FLAT GRIP is to be wiped dust-binding (with a microfiber mop). For wet wiping, make sure not to use cleaning agents with a pH value above 12.

Installation

Adapt the material to the room temperature. Note the direction of the arrow on the back side and place it in the same direction. Then stick with a dispersion adhesive.



anthracite