
# YOGA LINE ULTRA



For corridors where liquids such as oil run out, especially for manufacturing and production with high traffic.



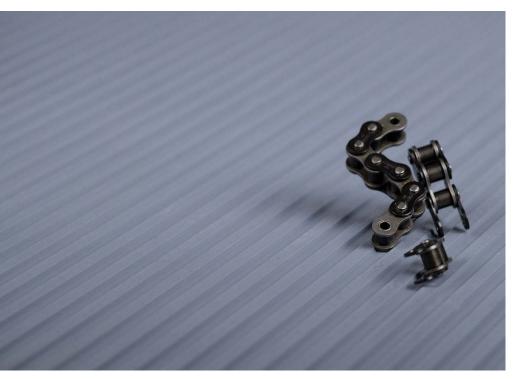

#### Sizes:

100 cm × max. 10 m

Thickness: 4 mm Weight: 4 kg/m<sup>2</sup>

Hardness: 80° ±5 shore A

## Surface:

wide grooves, closed **Material:** polyvinyl chloride (PVC)

### Characteristics

- small quantities of liquids flow off the wide grooves and escape into the deeper troughs.
- temperature-resistant (-23 °C to +60 °C)
- 100 % recyclable
- resistant to alkalis, acids, oils and most chemicals in case of short-term exposure (please request a test sample)
- can also be used as a workbench mat
- YOGA LINE ULTRA can be easily cut to size and a quick installation is guaranteed

### **Cleaning Instructions**

High pressure cleaner or industrial dry vacuum cleaner are ideal for an accurate cleaning. For a simple and quick cleaning you can also wash it down with water or simply sweep it off.

### Installation

Aids, which are needed for laying: box cutter, meter rod/measuring tape (only if you need to adjust it). Fixing or gluing is not necessary.



black